

High-Capacity VANGUARD Externally Piloted Regulators

PR180M Models Port Sizes: 3/4, 1, 1-1/4, 1-1/2



Model Shown: PR180M-6G

- ◆ Inline mounting.
- ◆ Diaphragm-type design.
- ◆ Self-relieving.
- ◆ Pressure gauge.
- ◆ NPTF port threads; optional SAE or BSPP threads.

SPECIFICATIONS

Ambient/Media Temperature:

40° to 175°F (4° to 79°C).

Body: Aluminum.

Dome: Zinc.

Fluid Media: Compressed air.

Inlet Pressure: 300 psig (21 bar) maximum.

Outlet Pressure: 0 to 200 psig (0 to 14 bar).

NOTE: Outlet pressure depends on the selection of the pilot regulator.

Pilot Ports: 1/4 NPTF.

Pressure Gauge: 0 to 200 psig (14 bar); 1/4 NPT gauge ports front and rear.


Seals: Nitrile.

Valve: Brass.

Valve Cap: Nylon.

FLOW CHART



Inlet Pressure: 100 psig (7 bar)

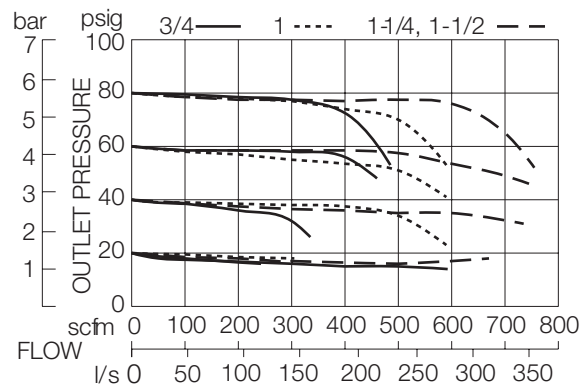

DIMENSIONS inches (mm)

Ports	A	B	C	Depth †	Weight † lb (kg)
3/4 1	4.4 (111)	4.6 (112)	2.4 (62)	2.8 (71)	1.88 (0.85)
1-1/4 1-1/2	4.9 (124)	5.1 (129)	2.1 (54)	2.8 (71)	2.25 (1.02)

† Less gauge.

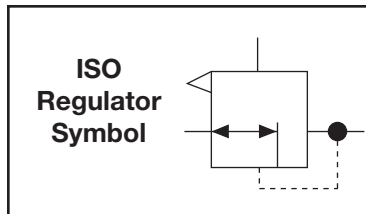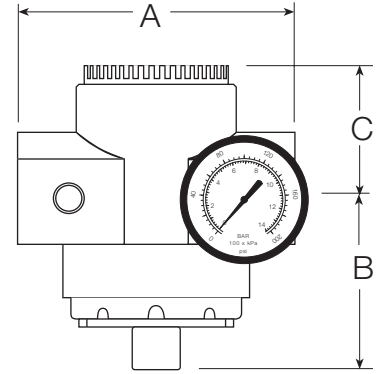

ORDERING INFORMATION

Change the letters in the sample model number below to specify the regulator you want.

NOTE: Order a pilot operator such as **R55-2**, **R56-2**, or **IR100-2** separately.

PR180M - 6 Y G W

PORT SIZE

- 3/4 NPTF..... 6
- 1 NPTF 8
- 1-1/4 NPTF 10*
- 1-1/2 NPTF 12*
- 1-1/16-12 UNF SAE S12
- 1-5/16-12 UNF SAE S16
- 1-5/8-12 UNF SAE S20
- 1-7/8-12 UNF SAE S24

PORT TYPE

- NPTF Threads Leave Blank
- BSP threads W

OPTION

- None Leave Blank
- 0-200 PSI Gauge G

OPTION

- None Leave Blank
- Non-relieving A

MOUNTING BRACKETS
See page 276.

* No mounting bracket available.